



## PRODUCT SPECIFICATION

# Genex® Multiplexer MONOCHROME, SIMPLEX



### Product Features

- Efficient Recording of up to 16 Cameras on 1 VCR
- “Covert” Feature Allows Selected Cameras to be Recorded, but not Displayed During Live Viewing or Playback. Viewing or Playback of “Covert” Cameras can be Password Protected
- Full-Screen Viewing of Cameras While Recording
- Advanced Digital Video Processing, Including Advanced Image Re-sizing and Digital Filtering. Provides High Quality Multi-Camera and Zoom Displays During Playback
- Looping Inputs
- Multi-Camera Display Modes – PIP (2), Quad (4), Nine (9) and Sixteen (16) Camera Displays
- Advanced Motion Detection – Programmable Detection Mask and Sensitivity Levels for Each Camera
- Four VCR Compatibility Modes – Standard, Auto Tracking, VCR Matching, and Custom
- Direct Menu Programming for Quick, Easy Setup
- Multi-language Support; English (Default), French, Spanish, or German
- Playback of Other Manufacturers’ Tapes\* (see note on back)
- On-Screen Alphanumeric Display – 12 Character Camera Titles, Time, Date, Alarm and Video Loss
- Two Independent Monitor Outputs
  - Main Output – Full-Screen Call-up and Sequencing While Recording; Full-Screen Call-up and Multi-Screen Displays During Playback
  - Spot Monitor Output – Full-Screen Call-up, Sequencing, Activity and Alarms
- Alarm Handling – Priority or Exclusive Alarm Recording and Display
- Remote Control via RS-485 Communications Port
- Pan/Tilt and Lens Control via Coaxitron® (see note on back)

The **Genex**® high performance, monochrome simplex multiplexer utilizes the latest in digital video processing technology, providing high-quality recordings or outstanding multi-camera displays.

Available in 9- or 16-channel versions, **Genex** can multiplex up to 9 or 16 cameras for recording on a single VCR. During recording any camera may be viewed independently or combined with others in a sequence. During playback any camera may be viewed independently or combined in a multi-camera display.

Unlike most multiplexers, **Genex** contains a powerful re-sizing engine which uses patented Active Image™ technology to provide broadcast quality, image re-sizing for both multi-camera and zoom displays. This technology allows **Genex** to provide higher quality images with less aliasing.

**Genex** allows live or recorded cameras to be displayed full-screen or combined with others in a picture-in-picture, quad, nine, or sixteen camera display. Cameras may also be displayed sequentially. An adjustable zoom mode provides full control of digital magnification of any camera for closer examination.

An advanced activity detector can prioritize cameras for faster recording and display. The additional Spot monitor output can be used to display full-screen cameras manually, sequentially, or as a result of alarms.

**Genex** is easy to use, offers intuitive push-button controls for operation and password-protected, on-screen menus for easy system setup.



MX4009MS (TOP)  
MX4016MS (BOTTOM)



International Standards Organization Registered Firm ISO 9001 Quality System



# TECHNICAL SPECIFICATIONS

## MODELS

MX4009MS	9-channel, monochrome simplex multiplexer, RS-170, 120 VAC, 60 Hz
MX4009MS-X	9-channel, monochrome simplex multiplexer, CCIR, 230 VAC, 50 Hz
MX4016MS	16-channel, monochrome simplex multiplexer, RS-170, 120 VAC, 60 Hz
MX4016MS-X	16-channel, monochrome simplex multiplexer, CCIR, 230 VAC, 50 Hz

## VIDEO

Input Level	1 Vp-p, composite
EIA RS-170	525 lines, 60 fields/second
CCIR	625 lines, 50 fields/second
Digital Image	768(H) x 512(V) pixels full screen
	8-bit luminance, 256 shades of gray
Geometric Error	Less than 1 percent, all modes
Resizing	Multi-element horizontal and vertical finite impulse response
Analog Processing	
Bandwidth	20 MHz
Character Generator	Programmable, bit mapped

## ELECTRICAL

Operating Voltage	120 VAC (+15/-30%), 50/60 Hz or 230 VAC (+15/-30%), 50/60 Hz
Power	Less than 25 watts
Video Inputs	Nine or sixteen BNC, looping with programmable termination 75 ohms Hi-Z
Monitor Outputs	Two
Main	BNC, 75 ohms
Spot	BNC, 75 ohms
VCR Inputs/Outputs	One each
VCR In	BNC, composite, 75 ohms
VCR Out	BNC, composite, 75 ohms
Alarm Inputs	Sixteen individually programmable for NO or NC
Relay Output	1 Form-C relay, 0.5 A continuous, 1.0 A momentary; programmable for alarm or activity activation

## GENERAL

Environmental	
Operating Temperature	32 to 122°F (0 to 50°C)
Relative Humidity	90% non-condensing
Desktop Dimensions	1.75" H x 17.2" W x 12.2" D (4.45 x 43.69 x 30.99 cm)
Rack Mount Dimensions	1.75" H x 19" W x 12.2" D (4.45 x 48.26 x 30.99 cm) (Rack ears and screws provided for rack mounting.)
Unit Weight	10 lb (4.53 kg) approximate
Shipping Weight	14 lb (6.34 kg) approximate

## CERTIFICATIONS

- ◆ CE, Class B (MX4009MS-X, MX4016MS-X)
- ◆ UL listed to Standard 2044 (MX4009MS and MX4016MS)
- ◆ cUL listed to Standard CSA 22.2 No. 1-94 (MX4009MS and MX4016MS)
- ◆ FCC, Class A (MX4009MS, MX4016MS)

## OPTIONAL ACCESSORIES

KBD4000**	Full-function keyboard controller; joystick control of pan/tilt functions. Use with Genex multiplexer and server. (See C1918 spec)
KBD4000V**	Same as KBD4000 except has 5-inch (12.7 cm) integrated video display, 120 VAC, 60 Hz. (See C1918 spec)
KBD4002**	Same as KBD4000 except keypad control of pan/tilt functions. (See C581 spec)


### Notes:

\* Pelco Genex multiplexers can normally decode tapes made with other manufacturer's multiplexers. However, Dedicated Micros models DM/SPG4/S/N/090 and DM/SPC4/D/N/6M must be properly programmed to create tapes that are compatible with Genex multiplexers. Tapes made with DM model SPR2AS/C/M/M are incompatible. (Refer to TechTip 00-3038 for details.)

\*\* When used with 15-bit (standard) Coaxitron® receivers such as the CX9000 Series, the PT7700, and the ED25/27/28/29, the KBD4000 supports all pan, tilt and lens functions and AUX on/off. It will not set or call presets, or support preset scan.

When used with the 32-bit extended Coaxitron® receivers such as Intercept®, Spectra®, and Legacy® LRD41C21/LRD41C22 Series, the KBD4000 will support all of the functions above, including set and call presets and patterns. It will not support programming of preset or pattern labels. If labels for presets or patterns are required, they would need to be programmed with a different control such as the MPT9500.

### MX4016MS REAR VIEW

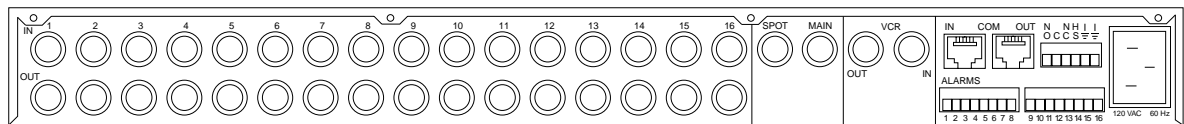

**Note:** MX4009CS has two rows of 9 BNCs only.

Indicates change or addition since last revision.

Genex®, Intercept®, Spectra®, Legacy® and Coaxitron® are registered trademarks of Pelco. Active Image™ is a trademark of Pelco. Specifications subject to change without notice. ©Copyright 2000, Pelco. All rights reserved.