


COVERT P.I.R. CAMERA

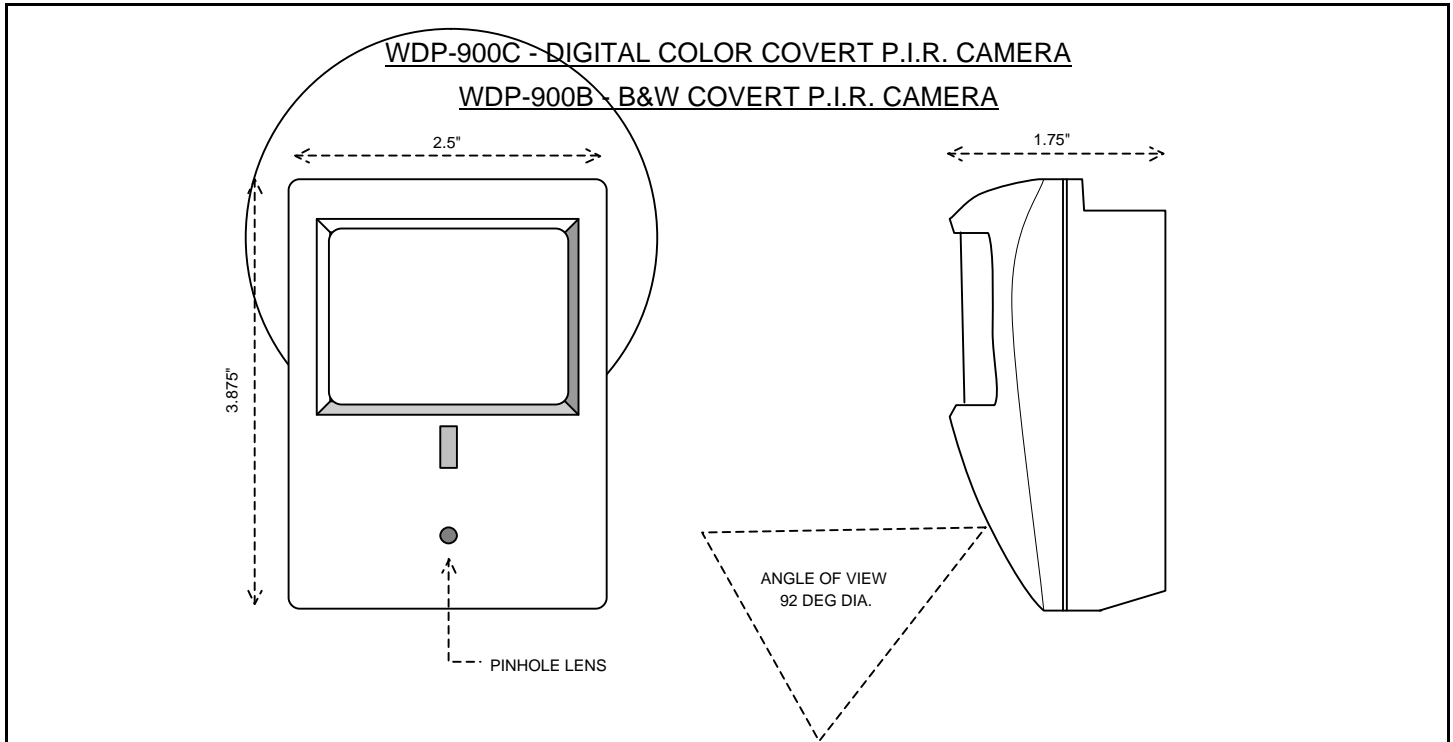

MAIN FEATURES:

- WIDE ANGLE PINHOLE LENS FOR MAXIMUM COVERAGE OF AREA WITHOUT DETECTION
- INCLUDES MOUNTING BRACKET FOR USE IN VARIOUS MOUNTING LOCATIONS
- HIGH RESOLUTION (420 TVL COLOR / 430 TVL B&W) COVERT CAMERA INCLUDED WITH UNIT

SPECIFICATIONS

MODEL	WDP-900C	WDP-900B
IMAGE PICK-UP DEVICE	1/4" COLOR CCD	1/3" B&W CCD
SCANNING SYSTEM	2:1 INTERLACE	2:1 INTERLACE
SYNC	INTERNAL SYNC	INTERNAL SYNC
RESOLUTION	420 TVL	430 TVL
S/N RATIO	46dB	48dB
GAMMA CHARACTERISTICS	0.45	
MINIMUM ILLUMINATION	0.3 LUX	0.03 LUX
LENS OPTIONS	4.3mm INCLUDED	4.3mm INCLUDED
VIDEO OUTPUT	COMPOSITE VIDEO SIGNAL : 1.0 Vp-p	COMPOSITE VIDEO SIGNAL : 1.0 Vp-p
WHITE BALANCE	AUTOMATIC	
BACK LIGHT COMPENSATION	AUTOMATIC	
ELECTRONIC SHUTTER	1/60 - 1/100,000 SEC NTSC 1/50 - 1/100,000 SEC PAL	1/60 - 1/100,000 SEC NTSC 1/50 - 1/100,000 SEC PAL
POWER REQUIREMENT	DC-12 VOLT - REGULATED	DC-9 VOLT - REGULATED
CONNECTOR TYPE	BNC OR RCA VIDEO BARREL PLUG CENTER POSITIVE	BNC OR RCA VIDEO BARREL PLUG CENTER POSITIVE
POWER CONSUMPTION	130mA	90mA
OPERATING TEMPERATURE	-5 DEG C TO 40 DEG C	-5 DEG C TO 40 DEG C
STORAGE TEMPERATURE	-10 DEG C TO 50 DEG C	-10 DEG C TO 50 DEG C
DIMENSIONS	2.5" (W) x 3.875 (H) x 1.75 (D)	2.5" (W) x 3.875 (H) x 1.75 (D)

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.