

# 9" B/W CCTV Monitor

## MM-9M • MM-9A



### Features

- ▶ 2 sets side-by-side 19" rack mountable
- ▶ Robust metal cover easy for store up
- ▶ High performance with high resolution more than 800 TV lines
- ▶ Universal power input AC 100 ~ 240V

#### MM-9M


- ▶ Dual scanning system EIA/CCIR compatible

#### MM-9A


- ▶ Scanning system for EIA or CCIR compatible
- ▶ Built-in clear and crisp speaker

### User control

#### MM-9M




#### MM-9A




### Rear panel


#### MM-9M

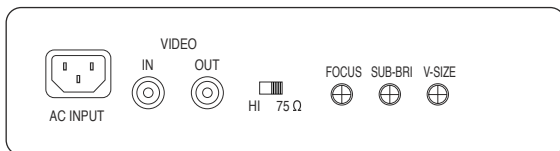

#### MM-9A

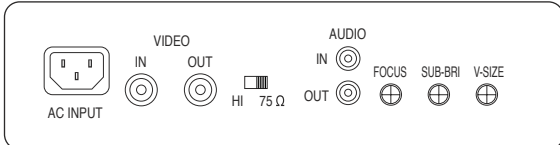

### Dimensions

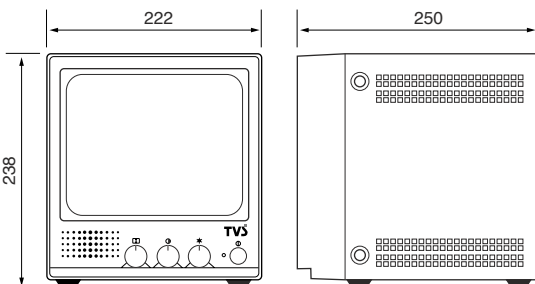

### Specification

<b>MODEL</b>	MM-9M / MM-9A
<b>Picture Tube</b>	10" diagonal B/W
<b>Horizontal Resolution</b>	>800 TV lines (Center)
<b>Scanning Frequency</b>	15.750 KHz / 60 Hz (EIA) 15.625 KHz / 50 Hz (CCIR)
<b>Video Input</b>	Composite video 1.0 Vp-p 75 Ω
<b>Video Connections</b>	Video BNC in x 1 Video BNC out x 1
<b>Audio Connections</b>	<b>MM-9A:</b> RCA in x 1 RCA out x 1
<b>Control</b>	<b>MM-9M:</b>
	<b>Front</b> Power on/off, Brightness, Contrast, V-Size
	<b>Rear</b> 75 Ω / Hi, Focus, V-Size, Sub-Bri
	<b>MM-9A:</b>
	<b>Front</b> Power on/off, Brightness, Contrast, Volume
	<b>Rear</b> 75 Ω / Hi, Focus, V-Size, Sub-Bri
<b>Power Input</b>	AC 100 ~ 240V, 50/60 Hz
<b>Power Consumption</b>	20W max
<b>Dimensions (WxHxD) Packing</b>	302 x 307 x 297 mm
<b>Product</b>	222 x 238 x 250 mm
<b>Weight</b>	<b>Net</b> 4.5 Kgs
	<b>Gross</b> 5.0 Kgs
<b>Operating Humidity Condition</b>	10% ~ 90%
<b>Operating Temperature Range</b>	-10°C ~ +50°C